

WALL MOUNT SL-16 SERIES



TYPE

SPECIFICATIONS

CONSTRUCTION: Extruded aluminum or brass angle cut cylinder; matching cast aluminum or cast brass FA-24 canopy

LENS: None

CANOPY GASKET: Black neosponge closed cell .190" thickness

LAMP SUPPLIED: 18w S8 #1141; 1200 hours average rating (25w max.)

LAMP OPTIONS: We recommend 10,000 hours average rating Xenon (-X) or Halogen (-H) or 3w 50,000 hours average rating OMNI-3 LED (-LED3)

SOCKET: Single contact bayonet, brass nickel plated lamp socket screw shell (Ba15s)

WIRING: Black 3 foot 18/2 zip cord from base of fixture

For 25 foot 16/2 fixture lead wire add -25F to catalog number

CONNECTION: FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)

MOUNTING: FA-24 Canopy included with 3 stainless steel #2 Phillips, flat head, wood screws


FINISH: Aluminum - Black texture polyester powder coat. Optional finishes available
Brass - Unfinished. Optional finishes available




SL-16-BRS

ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
SL-16-BLT	Aluminum Wall Mount Up/Down Light	18w S8 #1141	2.0 lbs.
SL-16-BRS	Brass Wall Mount Up/Down Light	18w S8 #1141	3.0 lbs.

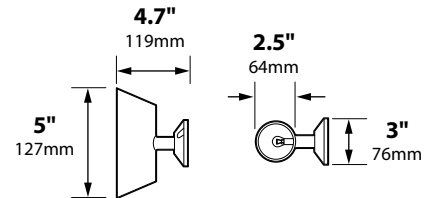

LIGHT DISTRIBUTION AND PHOTOMETRICS

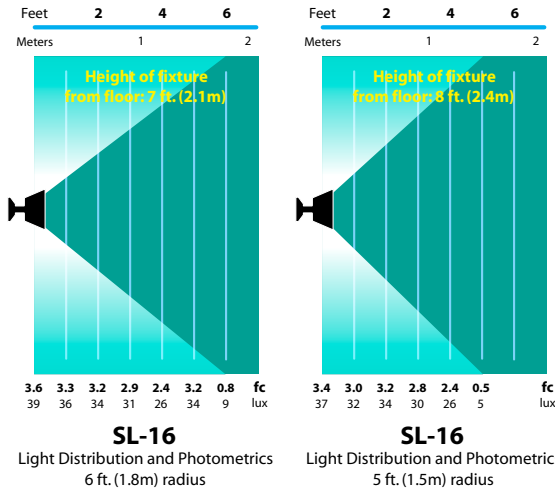

JOB INFORMATION	
Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-BAR/CAR	-BAV/CAV	-BAT