



# SURFACE MOUNT RXS-03 SERIES

TYPE

## SPECIFICATIONS

**CONSTRUCTION:** Copper directional Bullet; matching stamped copper FA-111-SM J-box and adjustable aiming bracket

**LENS:** High impact clear tempered convex glass

**O-RING:** High temperature red silicone

**LAMP SUPPLIED:** 20w MR8 (FL) 2000 hours average rating (20w max)

**LAMP OPTIONS:** 20w MR8 (SP) 2000 hours average rating

**SOCKET:** High temperature ceramic GU5.3 bi-pin with 250°C silicone lead wires

**WIRING:** Black 3 foot 18/2 zip cord from base of fixture (12v only)

For 25 foot 16/2 fixture lead wire add -25F to catalog number.

**CONNECTION:** FA-05 Quick Connector (not supplied) from fixture to main cable (12/2, 10/2 or 8/2 only)


**MOUNTING:** FA-111-SM surface mount J-box

**FINISH:** Unfinished Copper. Optional finishes available





## ORDERING INFORMATION

CATALOG NO.	DESCRIPTION	LAMP	SHIP WEIGHT
RXS-03-COP	Copper Surface Mount Bullet with Aiming Bracket and J-Box	20w MR8 (FL)	2.0 lbs.

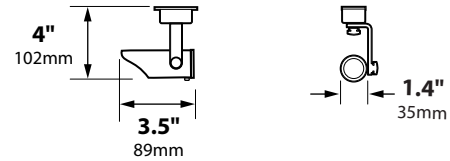

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

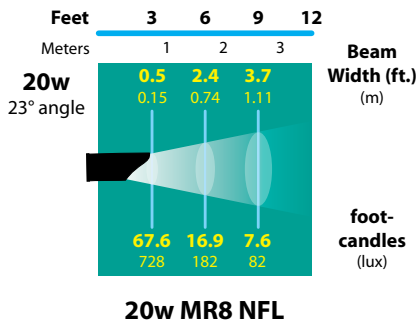

## BEAM/GLARE CONTROL ACCESSORIES

FA-08-23	Round 1/8"Hex Cell Louver
FA-11-23-BLUE	Blue Tempered Glass Lens
FA-11-23-GREEN	Green Tempered Glass Lens
FA-98-23	Linear Spread Tempered Glass Lens
FA-104-23	Wide Spread Tempered Glass Lens Softener

## JOB INFORMATION

Type:	Date:
Job Name:	
Cat. No.:	
Lamp(s):	
Specifier:	
Contractor:	
Notes:	

Black Texture (Standard)	Antique Verde	Bronze Texture	Camel	White Texture	Hunter Texture	Rust	Weathered Iron	Weathered Brown	Stucco	Rubbed Verde	Chrome Powder	Terra Cotta	Acid Rust	Acid Verde	Black Acid Treatment
-BLT	-ATV	-BRT	-CAM	-WTX	-HTX	-RST	-WIR	-WBR	-STU	-RBV	-CPR	-TRC	-BAR/CAR	-BAV/CAV	-BAT