



# ARROW LED FL-LED-MR16-SS7W


TYPE

**GO GREEN**  
EXCEEDS 50w HALOGEN

**12v Only**  
7w MR16 PLUG & PLAY LED FOR GU5.3 BI-PIN SOCKETS  
COMPATIBLE WITH MOST 12v MR16 ENCLOSED FIXTURES

**120v Only**  
7w GU10 BASE MR16 COMPATIBLE WITH MOST 120v MR16 ENCLOSED FIXTURES

- Long Life - 40,000 Hours L7 Average Rating (rated life to 70% initial light output)
- High Power White LED Light Source
- 550 Lumens (exceeds 50w Halogen)
- CRI 83 (Color Rendering Index)
- 2700K - 3000K Warm White Color
- Cool Beam, No UV or IR
- Mercury Free
- Input Voltage Range  
12v: 9v - 15v  
120v: 110v - 130v
- Dimmable
- DOE LM79 Tested / LM80 Compliant
- Power Factor >90%
- 5 Year Limited Warranty
- RoHS Compliant - Energy Efficient - Environmentally Friendly
- ETL/cETL/CE & Energy Star Certified
- Available in 15° / 36° / 80°
- Must be installed in sealed fixture
- 12v LEDs must be powered by a magnetic transformer or 12v DC power source ( ie: Battery)

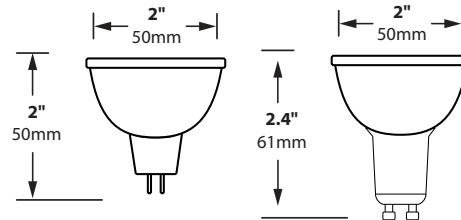

## ORDERING INFORMATION

| CATALOG NO.          | WATTAGE | VOLTAGE | VOLTAGE RANGE | LUMEN OUTPUT | COLOR TEMP  | BEAM ANGLE | BASE         |
|----------------------|---------|---------|---------------|--------------|-------------|------------|--------------|
| FL-LED-MR16SS7W15    | 7w      | 12v     | 9v - 15v      | 550          | 2700K-3000K | SP 15°     | GU5.3 Bi-Pin |
| FL-LED-MR16SS7W36    | 7w      | 12v     | 9v - 15v      | 550          | 2700K-3000K | FL 36°     | GU5.3 Bi-Pin |
| FL-LED-MR16SS7W80    | 7w      | 12v     | 9v - 15v      | 550          | 2700K-3000K | VWFL 80°   | GU5.3 Bi-Pin |
| FL-LED-MR16SS1207W15 | 7w      | 120v    | 110v - 130v   | 550          | 2700K-3000K | SP 15°     | GU10         |
| FL-LED-MR16SS1207W36 | 7w      | 120v    | 110v - 130v   | 550          | 2700K-3000K | FL 36°     | GU10         |
| FL-LED-MR16SS1207W80 | 7w      | 120v    | 110v - 130v   | 550          | 2700K-3000K | VWFL 80°   | GU10         |

## LIGHT DISTRIBUTIONS AND PHOTOMETRICS

