


NAME: _____ DATE: _____

PROJECT: _____

B-8R1

BOLLARD

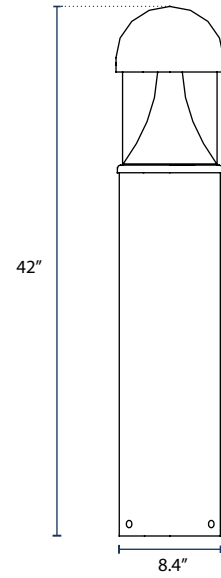

SPECIFICATIONS

Casting Extruded Aluminum	Finish Die-Cast Aluminum	CRI >70	Efficiency 100 lm/W
Driver Meanwell	Mounting Qty. (3) 3/8"x10" Anchor Bolts	Warranty 5-Year	
LED's Available Upon Request	Voltage 120-277V	Beam Angle 150°	

ORDERING

BOLLARD	LAMP TYPE	CCT	WATTAGE	VOLTAGE	MOUNTING	FINISH
B-8R1	INTEGRATED LED BOARD			100-277V	SURFACE	
		3000K	25W			DB Dark Bronze
		4000K	35W			BK Black
		5000K	50W			
			60W			