


B-8L2
BOLLARD

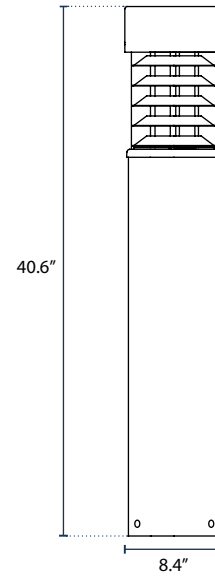

SPECIFICATIONS

Casting
Extruded Aluminum

Finish
Die-Cast Aluminum

Voltage
120-277V

Beam Angle
150°

Driver
Meanwell

Mounting
Qty. (3) 3/8"x16" Anchor Bolts
Surface

CRI
>70

Efficiency
70 lm/W

LED's
Available Upon Request

Warranty
5-Year

Lamp Type
Integrated LED Board

ORDERING

BOLLARD	CCT	WATTAGE	VOLTAGE	FINISH
B-8L2	<input type="text"/>	<input type="text"/>	100-277V	<input type="text"/>
	3000K	25W		DB Dark Bronze
	4000K	35W		BK Black
	5000K			