



UL Listing  
1598  
1838



**When ordering field installed kits, you must specify for use with MST/MAS or MLT/MAL**

## FIELD INSTALLED KITS

- |                                  |                                      |
|----------------------------------|--------------------------------------|
| 1. Mechanical Timer Kit (-T KIT) | 4. Remote Photocell Kit (-RPC KIT)   |
| 2. Digital Timer Kit (-DT KIT)   | 5. Full Phase Dimmer Kit (-D KIT)    |
| 3. Photocell Kit (-PC KIT)       | 6. 12v / 24v VAC Relay Kits (-R KIT) |

**MAS/MAL features an aluminum enclosure  
MST/MLT features a stainless steel enclosure**

**Note:** All kits shown below are plug and go. Each supplied with instructions and all hardware to make the upgrade. Plug 1/4" quick connector to the designated terminal and you're ready to enjoy your new or existing landscape lighting system.

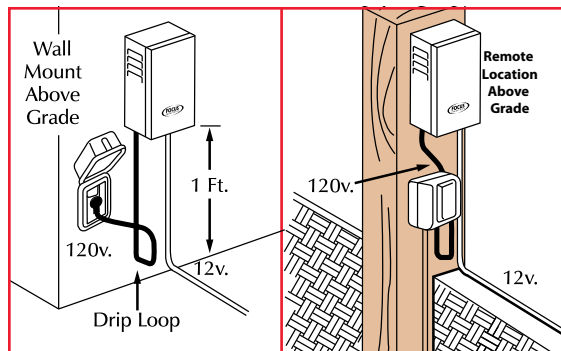

## MOUNTING LOCATIONS

Determined by the source of 110v/120v power. Typical mounting locations are closet, garage, car port, attic, basement, utility shed, pool enclosure or house exterior. When used outdoors, you must plug grounded power cord into a ground fault circuit interrupter (GFCI) supplied with weatherproof cover to prevent possible electric shock and/or short circuit as per the National Electric Code (NEC).

## MOUNTING INSTRUCTIONS

Mount all M Series weatherproof transformers within 2 ft. of a standard electrical 110v/120v receptacle using the hardware provided (mounting plate and screws) and 1 ft. above ground or grade if installing outdoors. Strip and place voltage direct burial cable in properly designated terminal lug sections and tighten securely. For

Lug System simply place stripped wire in barrier and screw down. Plug grounded power cord into a recommended Ground Fault Circuit Interrupter (GFCI) covered with a weatherproof junction box to prevent possible electric shock and/or short circuit as per the National Electric Code (NEC). Provide a water drip loop for the power cable to prevent water flow directly into the receptacle. SEE ILLUSTRATIONS.

## WARRANTIES FOR M SERIES

Limited Lifetime Warranty on stainless steel enclosures. 5 year warranty on aluminum MAS/MAL Transformer Series. 3 year warranty on electrical components. 1 year warranty on Mechanical (-T), Digital (-DT) & Astro (-AT) Time Clocks. No warranty on plug-in timers or other parts not supplied by FOCUS Industries.